index

Kubota

CE CONSTRUCTION EQUIPMENT ATTACHMENTS

SALES POCKET GUIDE

Revised 08/27/2026

Kubota-branded CE Attachments are manufactured by Land Pride, a leading manufacturer of tractor-mounted implements and skid plate attachments. Land Pride, now a Kubota company, has joined forces with Kubota Tractor Corporation to bring you a top-quality, growing line of attachments for your Kubota Skid Steer, Tractor Loader, Compact Track Loader, and Excavator.



Index

SKID ATTACHMENTS 4

Angle Brooms 43
Box Blades 10
Breakers 32
Buckets 23
Claw Grapples 20
Cold Planers 33
Combination Buckets 24
Dozer Blades 37
Drum Mulchers 29
Excavator Augers 14
Hopper Brooms 44
Light Material / Snow Bucket 27
Loader Boom 31
Pallet Forks 30
Plate Compactors 19
Powered Rakes 11
Primary Seeders 9
Road Saws 34
Rock Grapples / Buckets 21
Root Grapples 22
Scrap Grapples 26
Skid Augers 12
Skid Cutters 4
Skid Graders 15
Skid Steer Hitch 36
Skid Tillers 8
Snow Blowers 41
Snow Pushers 39
Stump Grinder 16
Tilt Hitch 35
Tree/Post Puller 45
Trenchers 18
Trip Edge Blades 38
Utility Buckets 28

COMPACT ATTACHMENTS 47

Compact Breakers 53
Compact Buckets 47
Compact Pallet Forks 48
Compact Rake 49
Compact Skid Auger 52
Compact Trenchers 51

SC25 Rotary Cutters

index



	SC25	SC40	SC60	SC70	SC110
GPM	18-23 gpm 24-30 gpm	15-25 gpm 26-43 gpm	18-31 gpm	28-43 gpm	26-45 gpm
Cut Capacity	2"	4"	6"	7"	10"
Blade Tip Speed	13,000 - 14,100	15,668 - 18,572	13,000 @ 31	14,870@ 43	14,870 @ 43
Widths	60", 72"	60", 72"	72"	72"	72"
Kubota Match	**SC25/40: SSV65 / SSV75 / SVL65 / SVL75 / SVL97** **SC60: SSV75 / SVL75** **SC70: SVL97; SC110: SVL97 / SVL110**				

FEATURES



- 10 Gauge steel deck
- 1/4" Sides



- 1-1/2" to 18" Cutting height
- &HQWHU PRXQW ZLWK 2 VHW



- Optional gauge wheel



- 2 Motor options

SC40 Rotary Cutters

index



	SC25	SC40	SC60	SC70	SC110
GPM	18-23 gpm 24-30 gpm	15-25 gpm 26-43 gpm	18-31 gpm	28-43 gpm	26-45 gpm
Cut Capacity	2"	4"	6"	7"	10"
Blade Tip Speed	13,000 - 14,100	15,668 - 18,572	13,000 @ 31	14,870@ 43	14,870 @ 43
Widths	60", 72"	60", 72"	72"	72"	72"
Kubota Match	**SC25/40: SSV65 / SSV75 / SVL65 / SVL75 / SVL97** **SC60: SSV75 / SVL75** **SC70: SVL97; SC110: SVL97 / SVL110**				

FEATURES



- 4" Diameter cut capacity
- 1/4" Deck thickness



- Pressure gauge
- Good hose protection



- Tapered full length skid shoes
- Inline bearing



- 2 Motor options

SC60 Rotary Cutters

index



	SC25	SC40	SC60	SC70	SC110
GPM	18-23 gpm 24-30 gpm	15-25 gpm 26-43 gpm	18-31 gpm	28-43 gpm	26-45 gpm
Cut Capacity	2"	4"	6"	7"	10"
Blade Tip Speed	13,000 - 14,100	15,668 - 18,572	13,000 @ 31	14,870@ 43	14,870 @ 43
Widths	60", 72"	60", 72"	72"	72"	72"
Kubota Match	**SC25/40: SSV65 / SSV75 / SVL65 / SVL75 / SVL97** **SC60: SSV75 / SVL75** **SC70: SVL97; SC110: SVL97 / SVL110**				

FEATURES



- 6" Diameter cut capacity
- 1/4" Deck thickness



- Single plate blade carrier
- Good hose protection



- Wide angled full length skid shoes



- Retractable front door

SC110 Rotary Cutters

index



	SC25	SC40	SC60	SC70	SC110
GPM	18-23 gpm 24-30 gpm	15-25 gpm 26-43 gpm	18-31 gpm	28-43 gpm	26-45 gpm
Cut Capacity	2"	4"	6"	7"	10"
Blade Tip Speed	13,000 - 14,100	15,668 - 18,572	13,000 @ 31	14,870@ 43	14,870 @ 43
Widths	60", 72"	60", 72"	72"	72"	72"
Kubota Match	**SC25/40:** SSV65 / SSV75 / SVL65 / SVL75 / SVL97 **SC60:** SSV75 / SVL75 **SC70:** SVL97; **SC110:** SVL97 / SVL110				

FEATURES



- 10" Diameter cut capacity
- 1/4" Deck thickness



- Push bar forces trees away from operator




- Patented bi-folding retractable door



- 16 Carbide grinding tips on bottom of blade carrier

SRT Skid Tillers

index

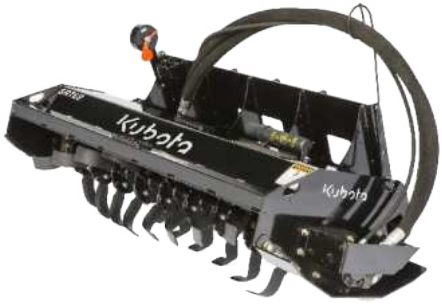

	SRT
GPM	14-42 gpm
Widths	62", 76"
Kubota Match	SSV65 / SSV75 / SVL65 / SVL75 / SVL97

FEATURES



- &HQWHU PRXQW RU R VHW
- Ripper shanks standard



- Spiral rotor design; less bounce & can be operated forward or reverse
- C-shaped bi-directional tines



- Patented depth indicator



- Replaceable skid shoes with depth control

PS20 Primary Seeders

index



	PS2072	PS2086
Tractor HP	25-60 not meant for small tractors such as Kubota BX	
Widths	72"	86"
Kubota Match	SSV65 / SSV75 / SVL65 / SVL75 / SVL97	

FEATURES



- Patent pending bi-directional seed cups
- Large capacity seed box



- Floating packer wheels to follow contours



- Universal Quick-Attach Hitch and 3-Pt Hitch standard



- Optional transport lights


BB30 Box Blades

index




	BB3072	BB3084	BB3096
Widths	72"	84"	96"
Kubota Match	SSV65 / SSV75 / SVL65 / SVL75 / SVL97		

FEATURES



- Bi-directional with hinged cutting edge
- Floating front axle



- Replaceable side plates with adjustable skid cutters



- Lift/tilt with parallel links standard



- Ability to accept attachment control system

SR27 Powered Rakes

index




	SR27
GPM	72: 12-24 gpm 90: 15-24 gpm
Hitch	5LJLG RU RDW RSWLRQ
Widths	72", 90"
Kubota Match	SSV65 / SSV75 / SVL65 / SVL75

FEATURES



- Kubota Plug-n-Work
- Hitch options:
  - Angle hitch only
  $QJOH RDW KLWFK
- Angle option: Manual/hydraulic with 20° adjustment R/L



- Carbide tipped stud bi-directional roller with variable speed



- Two adjustable material control blades
- Heavy-duty cast chain housing with oil bath



- Larger U-bolts on gauge wheel
- Competitively priced

SA20 Hyd. Post Hole Digger

index




	SA20	SA35
GPM	10-30 gpm	15-25 gpm
Hitch	& H Q W H U 2 V H W	Center
Augers	6"-36" Diameter	9"-36" Diameter
Kubota Match	SSV65 / SSV75 / SVL65 / SVL75 / SVL97	

FEATURES



- & H Q W H U R U R V H W P R X Q W



- Patent-pending level indicator



- 2" Hex output shaft



- Augers: 9" - 36"
- Auger extensions of 24" and 48"

SA35 Hyd. Post Hole Digger

index



	SA20	SA35
GPM	6-30 gpm	15-25 gpm
Hitch	& H Q W H U 2 V H W	Center
Augers	6"-36" Diameter	9"-36" Diameter
Kubota Match	SSV65 / SSV75 / SVL65 / SVL75 / SVL97	

FEATURES




- Mid-mount plate



- HD planetary drive system
- 2" Hex or 2-9/16" round output shaft



- Augers 9" - 36"



- Auger extensions of 24" and 48"

EA20/EA35 Excavator Auger

index





	EA20	EA35
GPM	6-15 gpm, 10-20 gpm, 15-30 gpm	15-30 gpm
Hitch	0RXQWV WR ¿W DOO 4XLFN $WWDFK PRGHOV	
Widths	9" - 36"	9" - 36"
Kubota Match	EA20: KX018 / KX71 / KX030 / KX033 / KX040 / KX057 / KX080 U17 / U25 / U27 / U35 / U48 / U55 EA35: KX030 / KX033 / KX057 / KX71 / KX080 / U25 / U27 / U35 / U48 / U55	

FEATURES



- 0RXQWV WR ¿W DOO .XERW Quick-Attach models H[FHSW 8 8
- All mounts accept cradle option



- EA20: 3 Motor options
- EA35: 1 Motor



- Drive units can be used with either SA or EA mounts



- Dig holes using excavators H[LELOLW\ WR DFFHVV KDU areas

SG25 Skid Graders

index



	SG25
HP	40-95 HP
Widths	72", 84"
Kubota Match	SSV65 / SSV75 / SVL65 / SVL75 / SVL97

FEATURES



- Standard adjustable ripper teeth
- Bi-directional cutting action



- Adjustable cutting angles



- Reversible & replaceable skid shoes



- Correct hitch angle
- Bucket carrier on top saves trailer space

SSG20 Stump Grinder

index



	SSG20
GPM	8-21 gpm
Kubota Match	SCL1000 / U25 / U27 / U35 / U48 / U55 KX030 / KX033 / KX040 / KX057 SSV65 / SSV75 (Std Flow Only) SVL75 (Std Flow Only)

FEATURES



- Optional Mounts
- Fits Compact Loaders, Skid Steers, Compact Excavators



- 24" Cutting wheel



- 15 Wearsharp® teeth



- Direct Drive

SSG25 Stump Grinder

index



	SSG25
GPM	17-32 gpm; 1100 rpm
Kubota Match	SSV65 / SSV75 / SVL65 / SVL75 / SVL97

FEATURES



- Kubota Plug-n-Work design



- 1/2" x 24" Cutting wheel with replaceable carbide teeth
- High speed cutting wheel



- 8" Max. depth with 55° arc



- Greasable hinge points

TR Series Trenchers

index




	TR48	TR60
Length	48"	60"
Kubota Match	SSV65 / SSV75 / SVL65 / SVL75 / SVL97	

FEATURES



- Manual or hydraulic sideshift



- 6" - 10" Width chain options



- Patented depth control



- Adjustable auger

PC Plate Compactors

index



	PC400	PC700	PC1000
GPM	14 gpm	18 gpm	18 gpm
Impulse Force	4,000 lbs.	6,400 lbs.	8,000 lbs.
Kubota Match	**U35 / U48 / U55 / KX033 / KX040 / KX057 / KX080**		

FEATURES



-)RXU IXQFWLRQ YDOYH FRQ
  SUHVVXUH UHJHQHUDWLRQ
  direction

- Sealed bearings for maintenance-free lubrication

SGC20 Claw Grapples

index



	SGC20	SGR15	SRB15
	Claw	Rock	Rock Bucket
Widths	72", 84"	66", 72", 84"	66", 84"
Kubota Match	SSV65 / SSV75 / SVL65 / SVL75 / SVL97		

FEATURES



- 6" Teeth spacing
- 1/2" Tooth thickness
- AR400 Teeth
- No gussets



- Dual action
- Two cylinders
- 50" Jaw opening



- 6" x 6" Frame tube



- 1-1/4" Greasable pivot pins

SGR15 Rock Grapples

index



	SGC20	SGR15	SRB15
	Claw	Rock	Rock Bucket
Widths	72", 84"	72", 84"	66", 84"
Kubota Match	SSV65 / SSV75 / SVL65 / SVL75 / SVL97		

FEATURES



- 37" Jaw opening
- 3" Teeth spacing with 3/8" tooth thickness



- Grade 80 steel tine material with front gusseted tine tips



- Side panels; deep dish design
- Independent grapples
- 1-1/4" Greasable pivot pins



- %XFNHW RSWLRQ 0RGHO 65

RG30 Root Grapples

index




	GB30	RG30
HP	Scrap Bucket	Root
Widths	68", 74", 80"	68", 74", 80"
Kubota Match	**SSV65 / SSV75 / SVL65 / SVL75 / SVL97**	

FEATURES



- 39-1/2" Grapple opening



- Gusseted 1/2" upper tines
- Bent up tine tips - gusseted 3/4" thick lower tines



- Two independent upper grapple jaws



- 1-1/4" Greasable pivot pins

Buckets

index



	SL	HD
Widths	68", 74"	66", 68", 74", 80"
Shell	10 ga.	3/16"
Kubota Match SL	SSV65 / SSV75	
HD	SSV65 / SSV75 / SVL65 / SVL75 / SVL97	
HD80	SVL97	

FEATURES



- Replacement buckets for Kubota SSVs and SVLs built to OEM specs



- Available with weld-on teeth or bolt-on edge
- Standard side cutters




- 10 ga. Shell on standard duty
- 3/16" Shell on HD



- $YDLODEOH ZLWK VWDQGDU RU ORQJ RRU

CB25 Combination Buckets

index

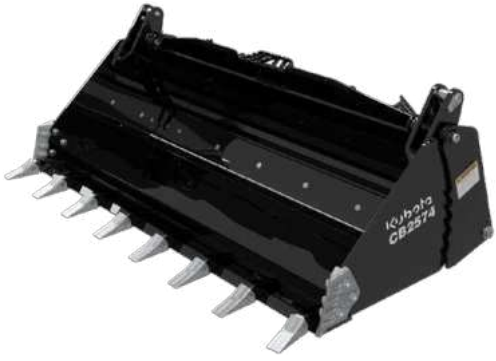

	CB25	CB35
	Combo Bucket	Combo Bucket
Widths	68", 74", 80"	74", 80", 84"
Kubota Match	**SSV65 / SSV75 / SVL65 / SVL75 / SVL97**	

FEATURES




- 4-in-1 Design
- 1-1/4" Greasable pivot pins w/bushings



- Dual cutting edge on jaw
- Bolt on cutting edge on back blade



- Reversible front cutting edge or replaceable tooth tips
- Struck capacity*: 10-16 cu.ft.
- Heaped capacity*: 15-22 cu.ft.
- *Depends on size/options



- &RXQWHUEDODQFH YDOYH

CB35 Combo Bucket

index



	CB25	CB35
	Combo Bucket	Combo Bucket
Widths	68", 74", 80"	74", 80", 84"
Kubota Match	SSV65 / SSV75 / SVL65 / SVL75 / SVL97	


FEATURES




- 4-in-1 Design
- 1-1/4" Greasable pivot pins w/bushings



- Dual cutting edge on jaw
- Bolt-on cutting edge on back blade



- Reversible front cutting edge or replaceable tooth tips



- Counterbalance valve option

GB30 Scrap Grapples

index



	GB30	RG30
HP	Scrap Bucket	Root
Widths	68", 74", 80"	68", 74", 80"
Kubota Match	**SSV65 / SSV75 / SVL65 / SVL75 / SVL97**	

TOP FEATURES



- 40-1/2" Grapple jaw opening
- 3/4" Grapple teeth



- Two independent upper grapple jaws
- 1-1/4" greasable pivot pins



Bucket:
- 1/4" Two-piece shell
- 1/2" End panels
- % R W W R P R Q * %



- Optional bolt-on cutting edge
- Hard hydraulic lines

LM25 Lt Material/Snow Buck

index



	LM25
Widths	84", 96", 108"
Kubota Match	SSV65 / SSV75 / SVL65 / SVL75 / SVL97

FEATURES



- Great for moving large volumes of loose material



- Bolt-on cutting edge optional
- Inside bend gussets



- Heavy-duty construction



- Cut out backplate for visibility

UB25 Utility Buckets

index




	UB25
Weight	476 lbs.
Kubota Match	SSV65 / SSV75 / SVL65 / SVL75 / SVL97

FEATURES



- Grade 50 steel



- Replaceable digging teeth
- Top tapered ripper teeth in side well



- Bent bottom to aide in leverage
- Hardened cutting edge



- Built in connection points for tie down


SDM Drum Mulchers

index



	SDM25	SDM30	SDM35
Widths	60"	50", 61", 72"	62", 76"
Kubota Match	**SSV65 / SSV75 / SVL65 / SVL75 / SVL97**		

FEATURES




- ST65mm bearings for easy adjustment



- Adjustable push bar with serrated ears



- High strength steel body construction



- All tool designs feature exclusive K Lock™ Technology

PFL46/56 Pallet Forks

index



	PFL46	PFL56
Lengths	48"	48", 60"
Kubota Match	SSV65 / SSV75 / SVL65 / SVL75 / SVL97	

FEATURES




- Backframe guard made with 3/16" steel and reinforced
- Removable top center bracket for walkthrough



- Spring loaded toggle fork position lock



- Wide frame with skid resistant step



- Forks adjust to 8" - 44"

LB60 Loader Boom

index



	LB60
Weight	376 lbs.
Kubota Match	SSV65 / SSV75 / SVL65 / SVL75 / SVL97


FEATURES



- 6" x 6" Tube construction



- 6,000 lb. Lift capacity
- Stabilizer chain connections / side plates



- Flat front



- Two 1" lifting lugs

BR Breakers

index



	BR3501	BR3502	BR3504
Frequency Range	880-2650 bpm	750-2250 bpm	600-1800 bpm
	BR510	BR560	BR860
Frequency Range	600-1800 bpm	500-1700 bpm	500-1700 bpm

Kubota Match	SSV65 / SSV75 / SVL65 / SVL75 / SVL97 KX018 / KX030 / KX033 / KX040 / KX057 / KX080 / K008 U10 / U17 / U25 / U27 / U35 / U48 / U55

FEATURES



- Multiple tool options



- Wear resistant steel housing
- CBE Constant blow energy



- Replaceable seal and bushing



- Noise reducing design provides lower operating noise level than competitors

CP30 Cold Planers

index



	CP3016LF	CP3018		
Cutting Widths	16”	18”		
	CP3024	CP3030	CP3040	CP3048
Cutting Widths	24"	30"	40"	48"

Kubota Match	SSV65 / SSV75 / SVL65 / SVL75 / SVL97

FEATURES



- Independent RH/LH shoe control allows unit to follow curb, gutter or contour



- Hydraulic, tilt, depth, sideshift, integrated into multi-function grips of SSV/SVL



- Removable cutting teeth
- Optional water system



- /LQH VHW XS SUHVVXUH DQG FDVH GUDLQ

SW30 Road Saws

index



	SW3010	SW3018
Cutting Widths	2.5"	4.5"
Kubota Match	SSV65 / SSV75 / SVL65 / SVL75 / SVL97	

FEATURES



- Hydraulic control of tilt, sideshift and depth are integrated into multi-function grips of the SSV/SVL



- Either 10" or 18" cutting depth
- Depth indicator makes it easy to know depth of cut being made



- 2.5" - 4.5" Cutting width



- Removable carbide picks use U R F N H W ¿ Q W H F K Q R O R J \

TH35 Tilt Hitch

index



	TH35
Kubota Match	SSV65 / SSV75 / SVL65 / SVL75 / SVL97


FEATURES



- 20° Tilt in either direction
- Nylon side pads



- Angle gauge and level - standard



- Gives ability to tilt any non-hydraulic attachment to compensate for uneven ground



- Ideal for contractors, landscapers and homeowners

SH35 Skid Steer Hitch

index



	SH35
Hitch	Cat. 1 or 2 non-PTO implements
Kubota Match	SSV65 / SSV75 / SVL65 / SVL75 / SVL97

FEATURES



- Adjustable
- Fits Cat. 1 or 2 implements



- Adjustable top hook
- Automatic locking



- Universal skid plate



- Built in 2" receiver hitch

DZ30 Dozers

index



	DZ30
Widths	84", 96"
Kubota Match	SSV65 / SSV75 / SVL65 / SVL75 / SVL97

FEATURES



- 3/8" Moldboard with full boxed bracing



- 3-1/2" x 8" Welded cylinders



- 3" Pivot pins



- 3 Piece reversible cutting edge
- 1/2" x 4" Full length wear bar

TE35 Trip Edge Blades

index



	TE3596	TE35108
Skid Steer HP	60-100 HP	60-100 HP
Widths	96"	108"
Kubota Match	**SSV65 / SSV75 / SVL65 / SVL75 / SVL97**	

FEATURES



- 22° Oscillation of blade to follow contour of the surface



- 30° Angle right and left



- HD designed tension springs



- Radiused blade rolls snow
  H F L H Q W O \


SSP15 Snow Pushers

index



	SSP1584	SSP1596	SSP2596
HP	30-60 HP		50-80 HP
Widths	84"	96"	96"
Kubota Match	SSV65 / SSV75 / SVL65 / SVL75 / SVL97		

FEATURES



- 30" Moldboard
- 29" Depth



- Adjustable rubber or steel cutting edge



- Rubber pull back blade option



- Exterior gussets
- AR400 skid shoes
- Adjustable & reversible


SSP25 Snow Pushers

index



	SSP1584	SSP1596	SSP2596
HP	30-60	30-60	50-80
Widths	84"	96"	96"
Kubota Match	SSV65 / SSV75 / SVL65 / SVL75 / SVL97		

FEATURES



- Hitch plate angled forward
- 36" Moldboard
- 35" Depth
- Z-shaped steps



- Adjustable rubber or steel cutting edge



- Rubber pull back blade



- /RZ SUR¿OH H[WHULRU JXVV
- AR400 skid shoes

SBL20/25 Snow Blowers

index



	SBL20	SBL25
GPM	12-20 gpm	12-33 gpm
Widths	48"	66", 74"
Kubota Match	SVL50x	SSV65 / SSV75 / SVL65 / SVL75 / SVL97

FEATURES



- Bolt-on cutting edge
- SBL25: Hydraulic powered with 3 motor options



- 4 Impeller blades
- SBL20: 20" Diameter impeller
- SBL25: 24" Diameter impeller



- 16” Auger Diameter



- SBL25: Level run indicator

SBL30/35 Snow Blowers

index




	SBL30	SBL35
GPM	17-33 or 27-33 gpm	34-41 gpm
Widths	74", 84"	74", 84"
Kubota Match	SSV65 / SSV75 / SVL65 / SVL75	SVL97

FEATURES




- SBL30: 2 motor options



- Optional bolt-on wings
- Optional fold-over chute



- 26" Diameter impeller
- 5 Impeller blades
- 16" Serrated rotor



- 2 Styles of skid shoes to choose from

P. 42

AB Angle Brooms

index



	AB
GPM	12-30
Widths	72", 84"
Kubota Match	SSV65 / SSV75 / SVL65 / SVL75 / SVL97

FEATURES



- 32" Brush diameter
- Quick change broom system
- Brush speed: 100-230 RPM



- Poly, wire, or combination bristles



- Replaceable hex drive system



- Hydraulic or manual angling

HB Hopper Brooms

index



	HB74	HB84
Widths	82"	92"
Kubota Match	SSV65 / SSV75 / SVL65 / SVL75 / SVL97	

FEATURES



- 3/16" Shell



- Bucket tapered front to back to hold material in
- HD metal top with bump protection



- 26" Replaceable brush
- Optional gutter groom adds 12" to cleaning width
- Tool-less height adjustment



- Optional dust suppression kit

STP15 Tree/Post Puller

index



	STP15	STP25
HP	30-65	30-100
Kubota Match	SSV65 / SSV75 / SVL65 / SVL75	

FEATURES



- Laser cut saw tooth design
- 10" Jaw opening



- 3" x 3-1/2" Square tubing frame



- Standard cylinder cover



- Great for removing trees, bushes, metal or wooden post

STP25 Tree/Post Puller

index



	STP15	STP25
HP	30-65	30-100
Kubota Match	STP15: SSV65 STP25: SSV65 / SSV75 / SVL65 / SVL75	

FEATURES



- Reinforced jaws
- 10" Jaw opening



- Top to bottom reinforced pivot pin



- 3" x 3-1/2" Square tubing frame



- Push bar option

CL Compact Buckets

index



	CL136L	CL236L	CL142L	CL242L	CL148H	CL248H
Hitch	CII	2-Lever	CII	2-Lever	CII	2-Lever
Widths	36"	36"	42"	42"	48"	48"
Heaped Cap.	4.9	5.6	5.8	6.5	8.9	8.9
Kubota Match	SCL1000					

FEATURES



- 48" High capacity buckets make moving large volumes of material I D V W D Q G H F H Q W



- Bolt-on edge



- Bolt-on teeth

CPF12 Pallet Forks

index



	CPF1236	CPF1242
Length	36"	42"
Capacity	1,200 lb.	
Kubota Match	SCL1000	

FEATURES



- Forks have adjustable width and feature a spring-loaded toggle to lock them in place



- Spill guard stops loads from toppling backwards onto the loader

CSR10 Compact Rake

index



	CSR1048
Widths	48"
Kubota Match	SCL1000

FEATURES



- Manually or hydraulically angle 25° left or right to smooth seedbeds or windrow debris



- Height adjustment is controlled by spacers and the roller features a bearing protector



- Side plates can angle



- Tubeless tires with sealant

CGC10 Compact Grapples

index



	CGC1040
Widths	40"
Kubota Match	SCL1000

FEATURES



- 5/16" Tine thickness



- AR400 Steel



- 32" Jaw opening



- 40" Wide

CTR10 Compact Trenchers

index



	CTR1030	CTR1036	CTR1048
Length	30"	36"	48"
Kubota Match		SCL1000	

FEATURES



- Chain options:
  - 30/36: 4", 6", 8", 10"
  - 48: 4", 6"



- 3 Chain styles:
  - 2-cup: *lightly compacted, sandy soils*
  - 4-cup: *wet, sticky conditions*
  - Scorpion and cup: *compacted or rock soil*



- 12" Spoil auger quickly clears the trench and is smoothed with an optional crumber tool

CSA10 Compact Skid Auger

index



	CSA10
GPM	10-20
Augers	6" - 24" Dirt Augers; 6" - 12" Rock Augers
Kubota Match	SCL1000

FEATURES



- Reinforced hitch plate



- Pendulum mount
- Reversible planetary gearbox with a 2" hex output shaft



- Attaches to a variety of augers:
  - 6" - 24" Dirt augers
  - 6" - 12" Rock augers

Compact Breakers

index



	BR3504
Frequency	600-1800 bpm
Kubota Match	SCL1000

FEATURES



- Multiple tool options



- Wear resistant steel housing
- CBE Constant blow energy



- Replaceable seal and bushing



- Cast housing with sound dampening for quiet operation

Notes

Notes

Notes

Share this guide with a colleague. Download an electronic pocket guide here:

