H130
Technical data


STAGE V
TIER 4 FINAL

Max Lifting Capacity	Engine Power	Travel Speed	Hydraulic Flow	Max Lifting Height
350 kg	16.8 kw	15 km/h	29 l/min	1.6 m




Technical data	H130Pro	H130	H130E
Battery Type			Ternary Lithium Battery
Battery capacity/kWh			14
Drive motor/kW			Shared with pump motor
Pump motor/kW			10
Charging voltage/V			54.6
Charging time/h			2
Loading time/h			4-8
Running time (uninterrupted)			4
Operating voltage V			48
Battery Ah			280
Engine model	RATO R740D		
Fuel type	Gasoline		
Cylinders	2		
Displacement cc	740		
Emission standards	EU Stage V&EPA Tier 4 Final		
Max engine output kW	16.8@3600rpm		
Max engine torque Nm	47@2500rpm		
Cooling system	Air		
Operating voltage V	12		
Battery Ah	20		
Operating weight kg	500		
Tipping load ,max kg	400		
Lifting capacity,max kg	350		
Operator's cab	None		
Travel speed km/h	0~15		
Steering angle °	0~360		
Turn radius inside/outside mm	0/993		
Standard tires	18x9.50-8		
Fuel tank capacity l	10		
Hydraulic oil tank capacity l	10		
Working hydraulic flow l/min	29		
Working hydraulic pressure bar	160		
Transmission type	Hydrostatic		

H130
Dimensions/mm

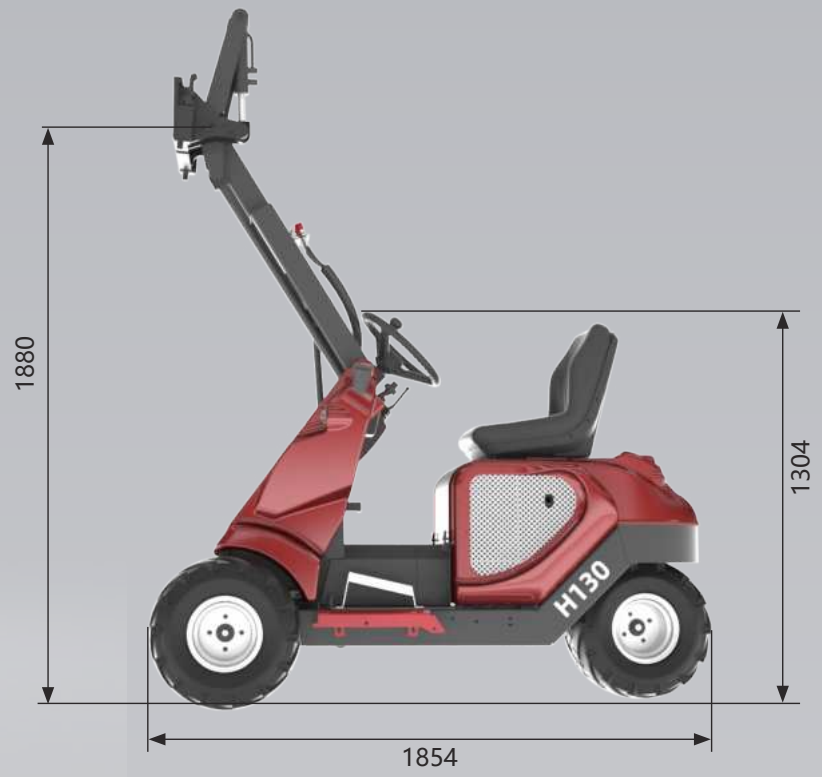



Tires size	Height	Width
18x9.50-8	1304	993

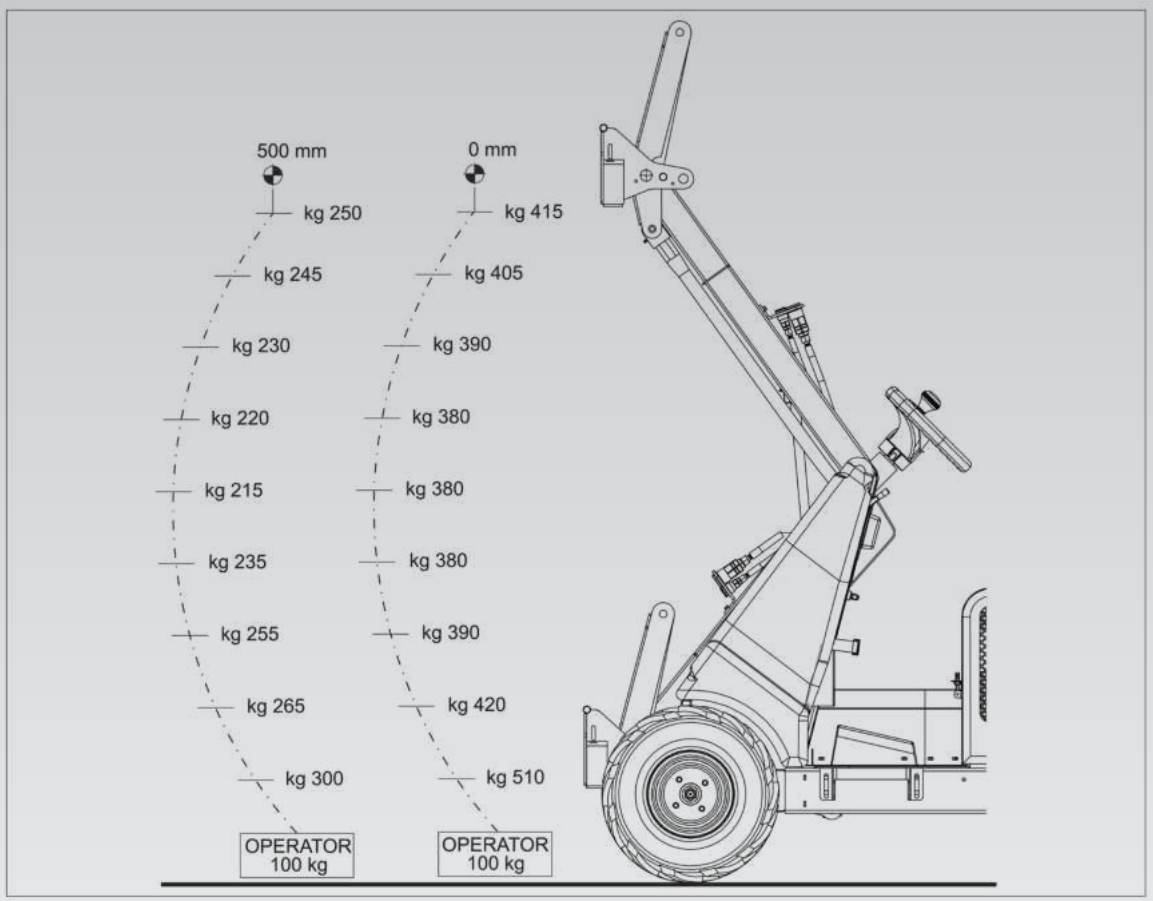

Products will continue to be optimized, so the technical data on this page may not be updated in real time.
For more information at: www.heracles.eu
Or contact us (contact information is on the back cover).